

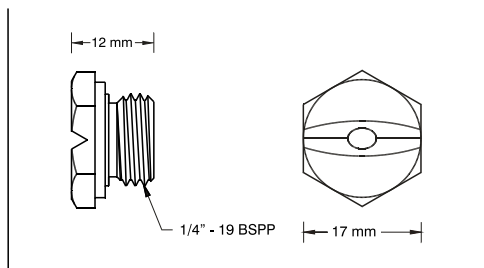


# BEX G-F serie vlakstraalsproeiers vervolg

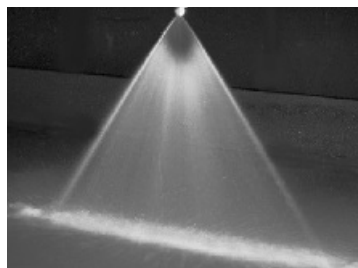

VLAKSTRAAL

Sproei- hoek	Capaciteits- nummer	Capaciteit in liters per minuut bij verschillende drukken in bar													
		0.3 bar	0.5 bar	0.7 bar	1 bar	1.5 bar	2 bar	3 bar	4 bar	5 bar	7 bar	10 bar	15 bar	20 bar	30 bar
45°	G1/4F45.40	0.15	0.20	0.24	0.28	0.34	0.40	0.49	0.57	0.63	0.75	0.89	1.10	1.26	1.54
	G1/4F45.63	0.25	0.32	0.38	0.45	0.55	0.63	0.77	0.89	1.00	1.18	1.41	1.73	1.99	2.44
	G1/4F451.0	0.39	0.50	0.59	0.71	0.87	1.00	1.22	2.44	1.58	1.87	2.24	2.74	3.16	3.9
	G1/4F451.3	0.49	0.63	0.75	0.88	1.08	1.25	1.53	1.77	1.98	2.34	2.80	3.42	3.95	4.9
	G1/4F451.6	0.62	0.80	0.95	1.13	1.38	1.60	1.96	2.26	2.53	2.99	3.6	4.4	5.1	6.2
	G1/4F451.9	0.74	0.95	1.12	1.34	1.64	1.90	2.33	2.69	3.00	3.55	4.2	5.2	6.0	7.3
	G1/4F452.5	0.97	1.25	1.48	1.77	2.17	2.50	3.06	3.53	3.95	4.7	5.6	6.8	7.9	9.7
	G1/4F453.2	1.22	1.58	1.87	2.23	2.73	3.15	3.86	4.5	4.98	5.9	7.0	8.6	10.0	12.3
	G1/4F454.0	1.55	2.00	2.37	2.83	3.5	4.00	4.9	5.7	6.3	7.5	8.9	11.0	12.6	15.4
	G1/4F454.8	1.84	2.38	2.82	3.36	4.2	4.75	5.8	6.7	7.5	8.9	10.6	13.0	15.0	18.4
	G1/4F456.3	2.44	3.15	3.7	4.45	5.5	6.3	7.7	8.9	10.0	11.8	14.1	17.3	20	24.4
	G1/4F458.0	3.1	4.00	4.7	5.66	7.0	8.0	9.8	11.3	12.6	15.0	17.9	21.9	25	31
	G1/4F4510	3.9	5.0	5.9	7.1	8.7	10.0	12.2	14.1	15.8	18.7	22.4	27.4	31.6	39.2
	G1/4F4513	4.9	6.3	7.45	8.8	10.8	12.5	15.3	17.7	19.8	23.4	28.0	34.2	39.5	49
	G1/4F4516	6.2	8.0	9.5	11.3	13.8	16.0	19.6	22.6	25.3	29.9	35.8	43.8	50.6	62
	G1/4F4520	7.8	10.0	11.8	14.1	17.3	20.0	24.5	28.3	31.6	37.4	44.7	54.8	63.2	77
G1/4F4525	9.7	12.5	14.8	17.7	21.7	25.0	30.6	35.4	39.5	46.8	55.9	68.5	79.1	97	
30°	G1/4F30.40	0.15	0.20	0.24	0.28	0.34	0.40	0.49	0.57	0.63	0.75	0.89	1.10	1.26	1.54
	G1/4F30.63	0.25	0.32	0.38	0.45	0.55	0.63	0.77	0.89	1.00	1.18	1.41	1.73	1.99	2.44
	G1/4F301.0	0.39	0.50	0.59	0.71	0.87	1.00	1.22	2.44	1.58	1.87	2.24	2.74	3.16	3.9
	G1/4F301.3	0.49	0.63	0.75	0.88	1.08	1.25	1.53	1.77	1.98	2.34	2.80	3.42	3.95	4.9
	G1/4F301.6	0.62	0.80	0.95	1.13	1.38	1.60	1.96	2.26	2.53	2.99	3.6	4.4	5.1	6.2
	G1/4F301.9	0.74	0.95	1.12	1.34	1.64	1.90	2.33	2.69	3.00	3.55	4.2	5.2	6.0	7.3
	G1/4F302.5	0.97	1.25	1.48	1.77	2.17	2.50	3.06	3.53	3.95	4.7	5.6	6.8	7.9	9.7
	G1/4F303.2	1.22	1.58	1.87	2.23	2.73	3.15	3.86	4.5	4.98	5.9	7.0	8.6	10.0	12.3
	G1/4F304.0	1.55	2.00	2.37	2.83	3.5	4.00	4.9	5.7	6.3	7.5	8.9	11.0	12.6	15.4
	G1/4F304.8	1.84	2.38	2.82	3.36	4.2	4.75	5.8	6.7	7.5	8.9	10.6	13.0	15.0	18.4
	G1/4F306.3	2.44	3.15	3.7	4.45	5.5	6.3	7.7	8.9	10.0	11.8	14.1	17.3	20	24.4
	G1/4F308.0	3.1	4.00	4.7	5.66	7.0	8.0	9.8	11.3	12.6	15.0	17.9	21.9	25	31
	G1/4F3010	3.9	5.0	5.9	7.1	8.7	10.0	12.2	14.1	15.8	18.7	22.4	27.4	31.6	39.2
	G1/4F3013	4.9	6.3	7.45	8.8	10.8	12.5	15.3	17.7	19.8	23.4	28.0	34.2	39.5	49
	G1/4F3016	6.2	8.0	9.5	11.3	13.8	16.0	19.6	22.6	25.3	29.9	35.8	43.8	50.6	62
	20°	G1/4F20.40	0.15	0.20	0.24	0.28	0.34	0.40	0.49	0.57	0.63	0.75	0.89	1.10	1.26
G1/4F20.63		0.25	0.32	0.38	0.45	0.55	0.63	0.77	0.89	1.00	1.18	1.41	1.73	1.99	2.44
G1/4F201.0		0.39	0.50	0.59	0.71	0.87	1.00	1.22	2.44	1.58	1.87	2.24	2.74	3.16	3.9
G1/4F201.3		0.49	0.63	0.75	0.88	1.08	1.25	1.53	1.77	1.98	2.34	2.80	3.42	3.95	4.9
G1/4F201.6		0.62	0.80	0.95	1.13	1.38	1.60	1.96	2.26	2.53	2.99	3.6	4.4	5.1	6.2
G1/4F201.9		0.74	0.95	1.12	1.34	1.64	1.90	2.33	2.69	3.00	3.55	4.2	5.2	6.0	7.3
G1/4F202.5		0.97	1.25	1.48	1.77	2.17	2.50	3.06	3.53	3.95	4.7	5.6	6.8	7.9	9.7
G1/4F203.2		1.22	1.58	1.87	2.23	2.73	3.15	3.86	4.5	4.98	5.9	7.0	8.6	10.0	12.3
G1/4F204.0		1.55	2.00	2.37	2.83	3.5	4.00	4.9	5.7	6.3	7.5	8.9	11.0	12.6	15.4
G1/4F204.8		1.84	2.38	2.82	3.36	4.2	4.75	5.8	6.7	7.5	8.9	10.6	13.0	15.0	18.4
G1/4F206.3		2.44	3.15	3.7	4.45	5.5	6.3	7.7	8.9	10.0	11.8	14.1	17.3	20	24.4
G1/4F208.0		3.1	4.00	4.7	5.66	7.0	8.0	9.8	11.3	12.6	15.0	17.9	21.9	25	31
G1/4F2010		3.9	5.0	5.9	7.1	8.7	10.0	12.2	14.1	15.8	18.7	22.4	27.4	31.6	39.2
G1/4F2013		4.9	6.3	7.45	8.8	10.8	12.5	15.3	17.7	19.8	23.4	28.0	34.2	39.5	49
G1/4F2016		6.2	8.0	9.5	11.3	13.8	16.0	19.6	22.6	25.3	29.9	35.8	43.8	50.6	62