


# BEX G-S serie volkegelsproeiers met 5 verschillende sproeihoeken vervolg

Sproei- hoek	Capaciteits- nummer	Aansl. buiten- draad BSPT	Capaciteit in liters per minuut bij verschillende drukken in bar									
			0.5 bar	0.7 bar	1 bar	2 bar	3 bar	4 bar	5 bar	7 bar	10 bar	
60°	R1/8S60.67	1/8	0.34	0.40	0.47	0.67	0.82	0.95	1.06	1.25	1.50	
	R1/8S60.82	1/8	0.41	0.49	0.58	0.82	1.00	1.16	1.30	1.53	1.83	
	R1/8S601.0	1/8	0.50	0.59	0.71	1.00	1.22	1.41	1.58	1.87	2.24	
	R1/8S601.2	1/8	0.60	0.71	0.85	1.20	1.47	1.70	1.90	2.24	2.68	
	R1/8S601.5	1/8	0.75	0.89	1.06	1.50	1.84	2.12	2.37	2.81	3.4	
	R1/8S601.8	1/8	0.90	1.06	1.27	1.80	2.20	2.55	2.85	3.4	4.0	
	R1/8S602.2	1/8	1.10	1.30	1.56	2.20	2.69	3.11	3.5	4.1	4.9	
	R1/8S602.7	1/8	1.35	1.60	1.91	2.70	3.3	3.8	4.3	5.1	6.0	
	R1/8S603.2	1/8	1.60	1.89	2.26	3.2	3.9	4.5	5.1	6.0	7.2	
	R1/4S604.0	1/4	2.00	2.37	2.83	4.0	4.9	5.7	6.3	7.5	8.9	
	R1/4S604.9	1/4	2.45	2.90	3.5	4.9	6.0	6.9	7.7	9.2	11.0	
	R3/8S606.0	3/8	3.00	3.5	4.2	6.0	7.3	8.5	9.5	11.2	13.4	
	R3/8S607.3	3/8	3.7	4.3	5.2	7.3	8.9	10.3	11.5	13.7	16.3	
	R3/8S608.6	3/8	4.3	5.1	6.1	8.6	10.5	12.2	13.6	16.1	19.2	
	R1/2S6010	1/2	5.0	5.9	7.1	10.0	12.2	14.1	15.8	18.7	22.4	
	R1/2S6012	1/2	6.0	7.1	8.5	12.0	14.7	17.0	19.0	22.4	26.8	
	R1/2S6014	1/2	7.0	8.3	9.9	14.0	17.1	19.8	22.1	26.2	31.3	
	R1/2S6017	1/2	8.5	10.1	12.0	17.0	20.8	24.0	26.9	32	38	
	G3/4S6020	3/4	10.0	11.8	14.1	20.0	24.5	28.3	32	37	45	
	G3/4S6023	3/4	11.5	13.6	16.3	23.0	28.2	33	36	43	51	
	G3/4S6027	3/4	13.5	16.0	19.1	27.0	33	38	43	51	60	
	G3/4S6032	3/4	16.0	18.9	22.6	32	39	45	51	60	72	
	G1S6038	1	19.0	22.5	26.9	38	47	54	60	71	85	
	G1S6045	1	22.5	26.6	32	45	55	64	71	84	101	
	G1S6052	1	26.0	30.8	37	52	64	74	82	97	116	
	G1S6062	1	31.0	37	44	62	76	88	98	116	139	
	G1S6073	1	37	43	52	73	89	103	115	137	163	

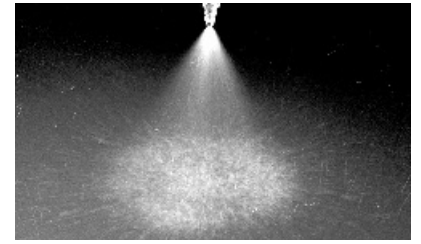

VOLKEGEL

Sproei- hoek	Capaciteits- nummer	Aansl. buiten- draad BSPT	Capaciteit in liters per minuut bij verschillende drukken in bar									
			0.5 bar	0.7 bar	1 bar	2 bar	3 bar	4 bar	5 bar	7 bar	10 bar	
45°	R1/8S45.67	1/8	0.34	0.40	0.47	0.67	0.82	0.95	1.06	1.25	1.50	
	R1/8S45.82	1/8	0.41	0.49	0.58	0.82	1.00	1.16	1.30	1.53	1.83	
	R1/8S451.0	1/8	0.50	0.59	0.71	1.00	1.22	1.41	1.58	1.87	2.24	
	R1/8S451.2	1/8	0.60	0.71	0.85	1.20	1.47	1.70	1.90	2.24	2.68	
	R1/8S451.5	1/8	0.75	0.89	1.06	1.50	1.84	2.12	2.37	2.81	3.4	
	R1/8S451.8	1/8	0.90	1.06	1.27	1.80	2.20	2.55	2.85	3.4	4.0	
	R1/8S452.2	1/8	1.10	1.30	1.56	2.20	2.69	3.11	3.5	4.1	4.9	
	R1/8S452.7	1/8	1.35	1.60	1.91	2.70	3.3	3.8	4.3	5.1	6.0	
	R1/8S453.2	1/8	1.60	1.89	2.26	3.2	3.9	4.5	5.1	6.0	7.2	
	R1/4S454.0	1/4	2.00	2.37	2.83	4.0	4.9	5.7	6.3	7.5	8.9	
	R1/4S454.9	1/4	2.45	2.90	3.5	4.9	6.0	6.9	7.7	9.2	11.0	
	R3/8S456.0	3/8	3.00	3.5	4.2	6.0	7.3	8.5	9.5	11.2	13.4	
	R3/8S457.3	3/8	3.7	4.3	5.2	7.3	8.9	10.3	11.5	13.7	16.3	
	R3/8S458.6	3/8	4.3	5.1	6.1	8.6	10.5	12.2	13.6	16.1	19.2	
	R1/2S4510	1/2	5.0	5.9	7.1	10.0	12.2	14.1	15.8	18.7	22.4	
	R1/2S4512	1/2	6.0	7.1	8.5	12.0	14.7	17.0	19.0	22.4	26.8	
	R1/2S4514	1/2	7.0	8.3	9.9	14.0	17.1	19.8	22.1	26.2	31.3	
	R1/2S4517	1/2	8.5	10.1	12.0	17.0	20.8	24.0	26.9	32	38	
	G3/4S4520	3/4	10.0	11.8	14.1	20.0	24.5	28.3	32	37	45	
	G3/4S4523	3/4	11.5	13.6	16.3	23.0	28.2	33	36	43	51	
	G3/4S4527	3/4	13.5	16.0	19.1	27.0	33	38	43	51	60	
	G3/4S4532	3/4	16.0	18.9	22.6	32	39	45	51	60	72	
	G1S4538	1	19.0	22.5	26.9	38	47	54	60	71	85	
	G1S4545	1	22.5	26.6	32	45	55	64	71	84	101	
	G1S4552	1	26.0	30.8	37	52	64	74	82	97	116	
	G1S4562	1	31.0	37	44	62	76	88	98	116	139	
	G1S12073	1	37	43	52	73	89	103	115	137	163	